

## Measures Open Channel Flow through Flumes and Weirs

### Open Channel Flow Monitor

#### Greyline OCF-IV

Displays, Transmits  
Totalizes and Data Logs

Simple 3-key Calibration  
Password Protected  
50,000 point Data Logger  
RS232 Serial Output  
4-20mA Output  
10-Digit Totalizer  
Windows Software

**New!**



**Easy to Install and Calibrate  
Simple, Accurate and Reliable**

#### Non-Contacting Sensor

The OCF-IV uses a non-contacting ultrasonic sensor mounted over a flume or weir to measure flow. It is accurate, reliable and verifiable. The separate, watertight electronics/display enclosure is mounted at a convenient location within 500 ft (150 m) of the sensor. The OCF-IV continuously displays, totalizes, transmits and data logs open channel flow.

#### Simple Keypad Operating System

Use the built-in keypad for fast, easy calibration with menu selection of flume or weir and measurement units (e.g. gallons, litres etc.) Calibration values and data logs are password-protected and retained during power interruptions. Use the OCF-IV to display flow reports of daily minimum, maximum average and total flow, or to transfer data logs to a PC computer.

**RELIABLE MEASUREMENT AND CONTROL**


# Built-in Data Logger creates Flow Reports

Save time and labour — flow information is stored automatically

- ✓ **50,000 data point capacity**
- ✓ **Logs reports including minimum, maximum, average and total in 1 to 24 hour intervals**
- ✓ **Logs flow rates in 1 second to 30 minute intervals**
- ✓ **RS232 output supports direct data transfer by cable or dial-up connection**


## FREE 'Greyline Logger' software for Windows™

It's included with each OCF-IV. This powerful software displays data in both graph and table formats. Greyline Logger runs on any PC with Windows™ 95, 98 or NT.

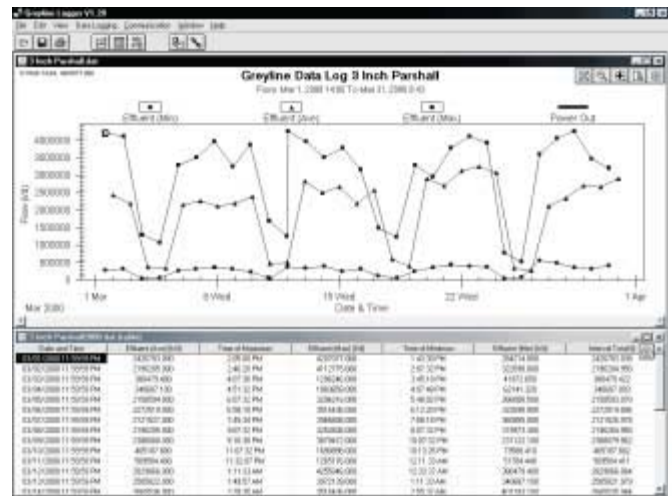

You can analyse flow data on-screen and save as disk files. Then reload the files to compare current and past date, or logs from different sites. Data files can be exported in graphic file formats, and as delimited text files for use in other spreadsheet or database programs.

Greyline Logger software instantly converts engineering units. Download the log file from your OCF-IV and then select 'Change Units' to instantly convert between US gallons, cubic meters, liters, imperial gallons or barrels. Change the graph display to line, bar or area plots to help analyse flow trends.

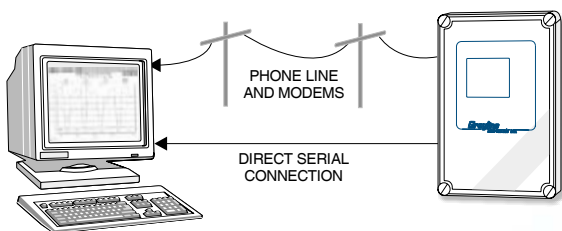

## Retrieve Data Logs by Modem or by direct connection to your PC

Transfer flow logs to your PC or laptop through the OCF-IV's RS232 output or by 'dial-up' connection through modems and telephone lines. Shielded RS232 cable and plugs are included with each OCF-IV.

## Display 'Daily' Flow Reports right on the OCF-IV Digital Display

Calibrate the OCF-IV data logger in 24-hour formatted mode and operators can scroll back through the daily flow report and view stored data. The report includes:

- Daily Total
- Daily Average
- Minimum Flow and Time of occurrence
- Maximum Flow and Time of occurrence

The OCF-IV's flow totalizer is also visible directly on the instrument and the isolated 4-20mA output can be connected to chart recorders, remote displays and wastewater samplers.

## Retains Memory during Power Interruptions

Time, date and data logs are retained by the built-in real time clock with battery backup. Calibration data is stored in permanent non-volatile memory and password-protected.



# OCF-IV Specifications

## General Specifications

<b>Electronics Enclosure:</b>	Watertight and dust tight NEMA4X (IP 66) polycarbonate with clear, shatterproof cover
<b>Accuracy:</b>	±0.25% of Range or 2 mm (0.08") whichever is greater, Repeatability and Linearity: ±0.1%
<b>Displays:</b>	Numeric Values: large 4 digit LCD; Menu/Status/Totalizer: 16 digit alphanumeric
<b>Data Logging:</b>	Programmable 50,000 point data capacity, time and date stamped or formatted flow reports including Total, Average, Minimum, Maximum and Times of occurrence
<b>Programming:</b>	3-button keypad with Menu selection. Calibration parameters are Password protected
<b>Power Input:</b>	100-130VAC 50/60Hz, 7.5 watts maximum
<b>Outputs:</b>	Isolated 4-20mA, 1000 ohm load maximum, Programmable Offset Isolated RS232 for Data Log transfer by cable connection to a PC, or dial-up connection through modems and phone lines. Programmable baud rates from 1200 to 19,200
<b>Control Relays:</b>	3 Relays, form 'C' dry contacts rated 5 amp SPDT; programmable level alarm, flow proportional pulse (sampler/totalizer), echo loss and air temperature alarm
<b>Electrical Surge Protection:</b>	Sensor, 4-20mA and AC power input
<b>Operating Temp. (electronics):</b>	-5° to 140°F (-20° to 60°C)
<b>Approximate Shipping Weight:</b>	10 lbs. (4.5 kg)

## OCF-IV Open Channel Flow Monitor


## Sensor Specifications

<b>Maximum Range:</b>	12 ft (3.66 m) with standard PZ12 sensor
<b>Deadband (Blanking):</b>	Programmable, Minimum 8 in (203.2 mm)
<b>Beam Angle:</b>	8°
<b>Operating Frequency:</b>	92 KHz
<b>Exposed Materials:</b>	CPVC
<b>Operating Temperature:</b>	-40° to 150°F (-40° to 65°C)
<b>Temperature Compensation:</b>	Temperature probe inside level sensor for high accuracy in changing temperatures
<b>Operating Pressure:</b>	20 psi (1.35 bar) maximum
<b>Sensor Cable:</b>	RG62AU coaxial, 25 ft (7.6 m) standard length (See Options)

## Options


<b>Sensor Cable:</b>	50 ft. (15 m) RG62AU coaxial continuous from Sensor, or splice up to 500 ft (150 m)
<b>Sensor Cable Junction Box:</b>	Watertight NEMA4 steel with connection terminal strip
<b>Power Input:</b>	200-250VAC 50/60Hz, 12VDC (battery power) or 24VDC
<b>Enclosure Heater:</b>	Thermostatically controlled - recommended for temperatures below 32°F (0°C)
<b>Intrinsic Safety Barrier:</b>	For Sensor mounting in Class I,II,III, Div. I,II, Groups C,D,E,F,G hazardous locations
<b>Sensor Mounting Stand:</b>	Adjustable, includes galvanized steel pipe, flanges, fittings and hardware

## Dimensions

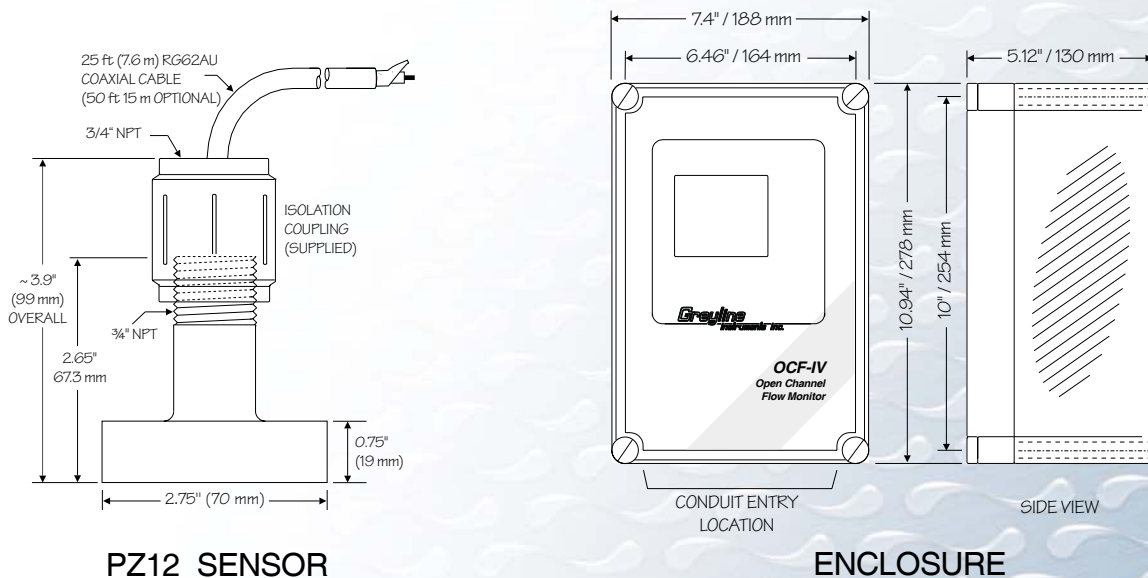

# OCF-IV Open Channel Flow Monitor

Displays ♦ Transmits ♦ Totalizes ♦ Data Logs

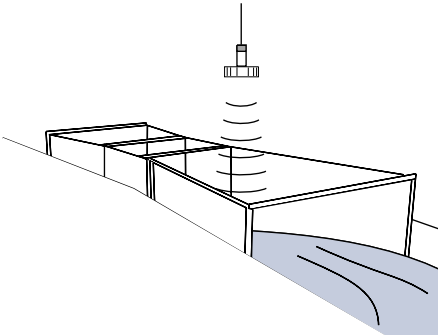

## *Field Programmable for Any Flume or Weir*

The OCF-IV includes a built-in 3-button keypad for easy calibration. Select your choice of engineering units (gallons, liters, cubic meters, etc.) and choose your flume or weir type from the 'Flume Selection' menu. The flowmeter also supports entry of flow formulae for calibration to non-standard flumes and weirs. Use Greyline's software utility 'Find K&n' (included) to calculate calibration constants for entry into the OCF-IV calibration menu.

Three built-in control relays can be individually programmed for flow alarms or with a flow proportionate pulse for remote totalizers, samplers or chlorinators. The isolated 4-20mA output can be connected to chart recorders, remote displays or controllers.

## *Smart Operating System*

The OCF-IV tracks flow continuously through any flume or weir. False echoes from turbulence, splashing rain or snowfall are automatically rejected. Temperature compensation is automatic for high accuracy. Continuous flow is shown on the large 4-digit display while the 16-digit alphanumeric display scrolls automatically to display maximum flow and totalizer values.



## *NEW Non-Contacting Sensor*

Designed specifically for open channel flow applications, the new Greyline PZ12 sensor can be mounted just 8" (20.3 cm) above the maximum water level so it is ideal for confined space and small flumes. It is rated for measurement ranges up to 12 ft (3.66 m).

The PZ12 sensor mounts above the flowing liquid so there is no fouling and no maintenance is required. It will not be damaged by accidental submersion and it self-tunes to extended cable lengths up to 500 ft (152 m).

Authorised Channel Partner in India

**Universal**  
*engineers*

BE-200, Lane No. 6,  
Hari Nagar, New Delhi -110064  
Tel./Fax : 91-11-25127461, 25496072, 9958004710  
GSM: 9810269366, 9810589043  
E-mail: [dynamic6@vsnl.com](mailto:dynamic6@vsnl.com), [contact@ues.net.in](mailto:contact@ues.net.in)  
[www.ues.net.in](http://www.ues.net.in)